

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: New Works

Supplier's address: Sales Support, Bredgade 42, 1260, København K, Denmark

Model identifier: Tense Ø55

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	N/L connect line		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Yes

Product parameters

Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	11	Energy efficiency class	F
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	1 054 in Wide cone (120°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 700
On-mode power (P_{on}), expressed in W	11,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	83
Outer dimensions without separate control gear, lighting control	Height	150	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	550	
	Depth	550	
			See image in last page

parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,456 0,409
Parameters for LED and OLED light sources:			
R9 colour rendering index value	10	Survival factor	1,00
the lumen maintenance factor	0,98		
Parameters for LED and OLED mains light sources:			
displacement factor (cos ϕ_1)	0,70	Colour consistency in McAdam ellipses	2
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	0,2	Stroboscopic effect metric (SVM)	0,0


(a)-: not applicable;

(b)-: not applicable;


Table 7

Model No.: Tense pendant Ø50

Spectral Distribution

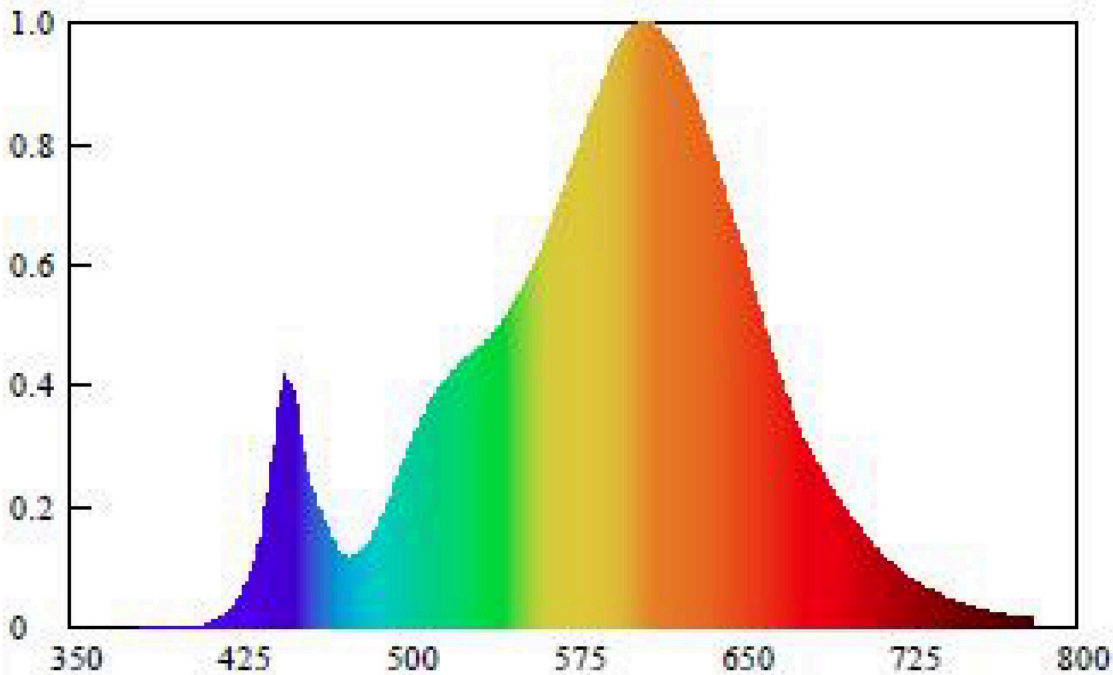

Model placed on the Union market from 01/01/2025



EPREL registration number: 2153057

<https://eprel.ec.europa.eu/qr/2153057>

Supplier: New Works ApS (Manufacturer)

Website: www.newworks.dk

Customer care service:

Name: Sales Support

Website: www.newworks.dk

Email: info@newworks.dk

Phone: +4572309999

Address:

Bredgade 42, 1260, København K, Denmark